



MACCHINE LAVORAZIONE LEGNO - WOODWORKING MACHINERY

Forty years experience, leader in the production of traditional woodworking machines. The internally managed production allows to perform all types of work from the machine in series to custom production. The control of each passage ensures the proper functioning of the machinery and the attention to the detail.

AD415

THE SMALL WORKING LIKE THE BIG



AD415

The large sized thicknessing tables, made entirely in ribbed cast iron, ensure an excellent level of finish on every kind of wood. The hydraulic rear pistons close the flat flush gradually and effortlessly for the operator; the absence of springs also avoids the deformation of the flat even after a long time.



HYDRAULIC PISTONS FOR WIRE PLANES (CE)
The two hydraulic pistons mounted on the planes, make the closure secure and comfortable, without creating deformations to the same planes over time.

SANDBLASTED ROLLER OUTPUT
The sandblasted exit roller ensures perfect towing on any type of material.

TWO ADVANCE SPEED OF THE THICKNESS
The two feed speeds of the thickness rollers are made by an electric motor reducer; the large opening compartment makes any type of maintenance very convenient.



ALUMINUM RECLINE ANGLE
The aluminum recline angle from 0° to 45° is very comfortable and robust: its length allows an excellent support of the work piece.



SPIRAL PLANER SHAFT




TERSA PLANER SHAFT

BIT MORTISING MACHINE
The machine can be equipped with a large-sized cutting unit with a 0 - 16 mm wescott spindle.



SUCTION HOOD OF LARGE DIMENSIONS

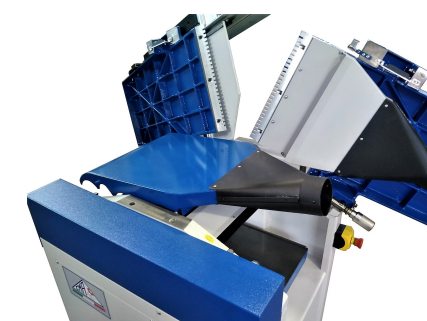

ROLLERS ON THE THICKNESS
The thickness plate can be accessorized with 2 adjustable rollers, to guarantee a safe towing even in the worst working conditions.



TECHNICAL DATA

AD415

ON DEMAND

WIRE PLATE			Increased engine
SPINDLE SHAFT WITH 4 KNIVES Ø 120 mm.	mm	2100 X 415	Electromagnetic brake
PLAN DIMENSION	g/1'	5000	Rubber roller
MAX. REMOVAL	mm	6	N. 2 rollers on the thickness plane
ENGINE POWER	KW.	3 (HP 4)	Spiral 3 planer shaft
TILTING GUIDE / DIMENSIONS	°/mm	0° - 45° 1200 X 150	
THICKNESS PLATE			
MAX WIDTH / MIN HEIGHT - MAX. HELPFUL	mm	415 / 5 - 240	Tersa monobloc planing shaft with reversible knives
MAX. REMOVAL	mm	5	Eccentric or pneumatic pre-drafting arm
ADVANCE SPEED	m/1'	6,5 / 13	Spindle wescott
OVERALL DIMENSIONS	mm	2120 X 870 X 1100	
NET WEIGHT	Kg	500	
SOUND EMISSION ACCORDING TO ISO7960 STANDARDS - WIRE PLATE	LA eq [dB(A)]	77,5 - 86,3	
SOUND EMISSION ACCORDING TO ISO7960 STAND. - THICKNESS PLATE	LA eq [dB(A)]	79,3 - 89,4	BIT MORTISING MACHINE
DUST EMISSION ACCORDING TO STANDARDS DIN 33893 - WIRE PLATE	mg/m3	1,655	PLAN DIMENSION
DUST EMISSION ACCORDING TO STAND. DIN 33893 - THICKNESS PLATE	mg/m3	0,66	TRANSVERSAL RACE
The Company reserves the right to make any changes either technical or constructive.			LONGITUDINAL RACE
			VERTICAL RACE
			mm
			AD415
			600X300
			210
			120
			140



C.M.A. 2000 S.r.l.

Via Cesare Pavese, 22 - 47853 Cerasolo Ausa Coriano (RN)

Tel. e Fax: +39 0541 759315

info@cma2000srl.com

commerciale@cma2000srl.com

assistenza@cma2000srl.com

www.cma2000srl.com

P.IVA 03124370408



CMA 2000



CMA 2000 srl



CMA 2000

MADE IN ITALY

