



Forty years experience, leader in the production of traditional woodworking machines. Production is managed internally, allowing to run every type of work, from the machines in series to the customized ones. The supervising of each step guarantees the good functioning of machines and all details are well cared.

LS90

BELT SANDING MACHINE




LS90


THE GREAT DIMENSION OF THE PULLEYS ALLOWS A SIMPLE AND COMFORTABLE USE, EITHER THROUGH THE SUPPLIED PAD OR THROUGH THE HAND PAD. MOREOVER, DURING A BIG REMOVE, THEY ALLOW AN IDEAL DISPERSION OF THE HEAT.



ROLLER BUFFER IN TOUGH RUBBER

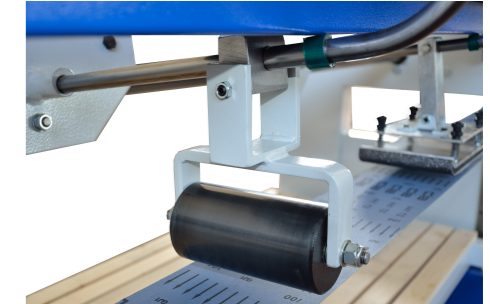


SELF-LEVELING BUFFER WITH GRAPHED CANVAS

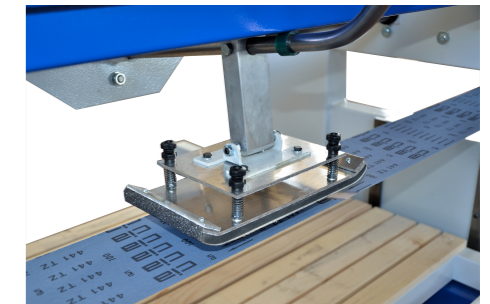


CAST-IRON VERTICAL SLIDING GUIDES
Our guides for the vertical movement of the plane are made in cast-iron: this guarantees solidity and durability. They are coupled with steel toothed racks.

LIGHT POINT ON THE PLANE
The light point on the worktop guarantees a better quality of work and facilitates the operator.

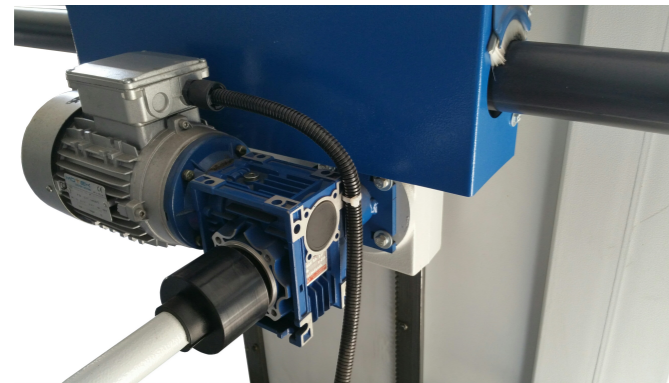

MOTORIZED LIFTING OF THE PLANE

The lifting of the plane is actioned by a geared motor with great torque, allowing a linear and precise movement. A single lifting geared motor is provided as standard but the machine can also be equipped by two geared motors for the most demanding works.

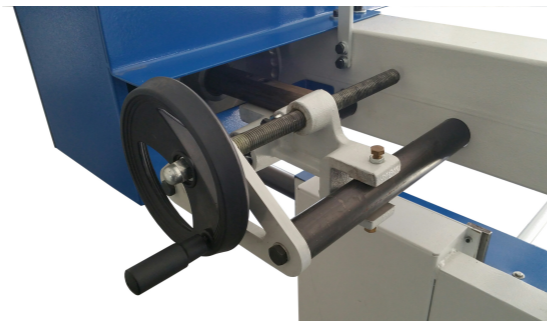

CAST IRON BELT TENSIONER

Our large cast iron belt tensioner guarantees an excellent tension for all types of belts.



INVERTER

We can equip the machine with an inverter to give any finish required by customers. This type of inverter also maintains an excellent torque at low speeds motive. The command terminal is intuitive allowing to work clockwise and counterclockwise.



CAST IRON SHEAVES

All movements are performed on cast-iron sheaves with ball bearings.

LS90

BELT SANDING MACHINE

TECHNICAL DATA	
Volt	400 / 50 Hz
Length	2500 mm
1 speed belt motor	5,5 HP (1400) rotations
Lifting motor	0,5 HP
Pulleys	Ø 300
Table width	800 mm
Automatic vertical movement of the table	500 mm
Peripheral speed of the belt	28 m/sec
Net weight	600 Kg approximately
OPTIONALS	
Length 2700 mm	Inverter
Length 3000 mm	Belt double inversion
Special lengths - all measures	Motor protection (each)
Buffer 150 mm	Single phase motor (each)
Suction motor HP 1	Assembled machine
Suction bag	Arm complete roller
Belts of all measures	Light point on work surface
Casing tubing holder Right Ø 120	Pulley or belt blowers
Belt motor 7 HP (700/1400) rotations	



C.M.A. 2000 S.r.l.

Via Cesare Pavese, 22 - 47853 Cerasolo Ausa Coriano (RN)

Tel. e Fax: +39 0541 759315

info@cma2000srl.com

commerciale@cma2000srl.com

assistenza@cma2000srl.com

www.cma2000srl.com

P.IVA 03124370408



CMA 2000



CMA 2000 srl



CMA 2000

MADE IN ITALY

